


Battery Mount Bracket

Installation Instructions

Application: 2005-10 Mustang

Tools Needed:

5mm allen wrench
6mm socket wrench

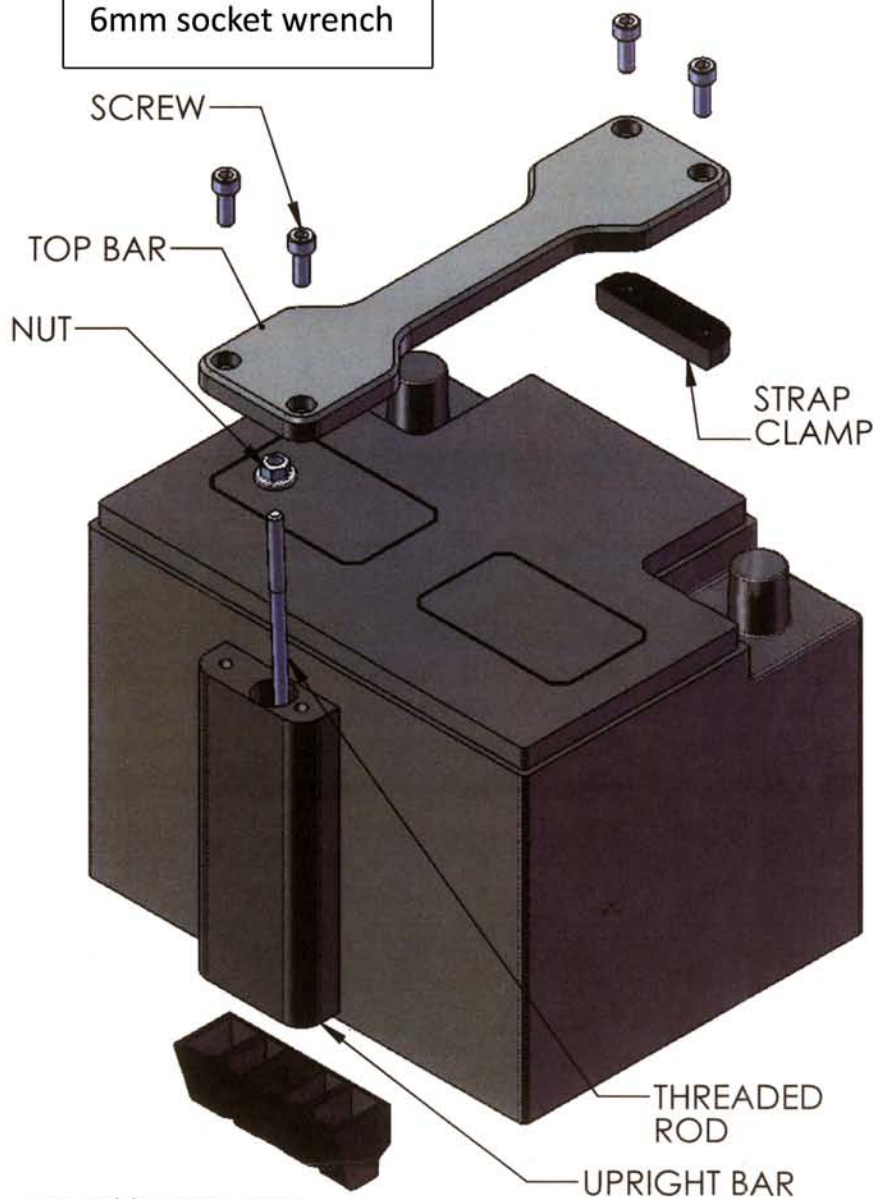

WARNING:

As always, when working on or around electrical components, be sure to disconnect the battery before performing any work.

To place an order, or for current pricing, call Shelby Performance Parts. For a list of availability or for any other questions about Shelby Performance Parts or our products, visit ShelbyPerformanceParts.com or call our customer service department toll free:

1.702.405.3500

Mon-Fri 8:00 a.m. to 4:30 p.m. - PST

6755 Speedway Blvd
Las Vegas, NV 89115

t: 1.702.405.3500
f: 1.702.405.3500

Assembly Instruction:

1. Remove existing battery clamp bolt assembly
2. Assemble top bar, rear screws and strap clamp loosely
3. Thread existing strap between top bar and strap clamp. When top bar is centered front to back on battery, tighten bolts. Tuck end of strap between battery and battery blanket. **NOTE: on 2010 models, it will be necessary to cut strap just beyond the clamping area, due to tighter fit**
4. Screw threaded rod into hole used for battery strap bolt
5. Drop upright bar onto stud and fasten with nut provided
6. Install front screws and tighten

Satisfaction Guarantee

If you are not happy with this product for any reason or found product to be defective in manufacturing, simply return it to Shelby Performance Parts, Inc. within 30 days of purchase and we will replace it – no questions asked. We stand behind our products one hundred percent, so you can sit behind in the wheel with pride.

**YOU MUST call Shelby Performance parts Customer Service for a Return Authorization (RA) before returning any product. Proof of purchase and dated receipt must be present with any return. All returned products are tested and if found to be damaged by the installer, no replacement will be issued. You pay the cost to ship to us, we pay for the return shipping. Guarantee does not include any labor and/or tax charges.*